

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number  
**WO 2005/005734 A1**

(51) International Patent Classification<sup>7</sup>:  
E02D 19/16, 29/16, 31/00, E04B 1/70

**E02B 3/16,**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/AU2004/000930

(22) International Filing Date: 9 July 2004 (09.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003903547

10 July 2003 (10.07.2003)

AU

(71) Applicant and


(72) Inventor: LYDEN, Paul, John [AU/AU]; 17 Goolabah Drive, Tallebudgera, Queensland 4228 (AU).

(74) Agent: CULLEN & CO.; Level 26, 239 George Street, Brisbane, Queensland 4000 (AU).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A BUILDING STRUCTURE AND A METHOD OF FORMING A BUILDING STRUCTURE

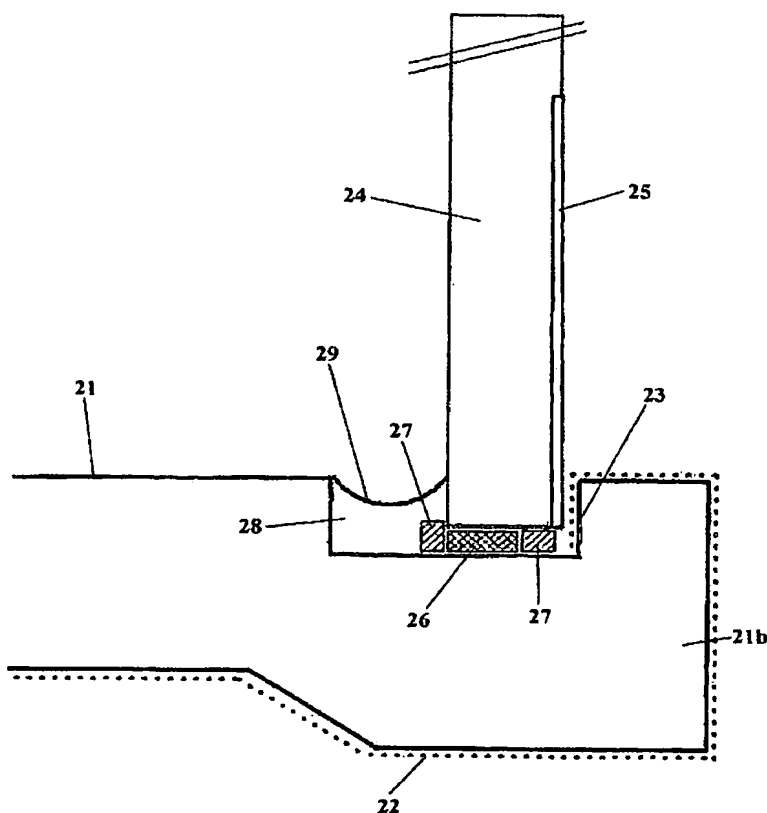

(57) Abstract: A building structure comprising a footing (21b), wherein the footing (21b) includes a channel (23), and at least one panel (24), wherein the panel (24) is located within said channel (23), wherein the footing (21b) is disposed on a waterproofing membrane (22) which membrane extends along side walls of the footing (21b) and into said channel (23) and wherein the panel (24) has an external waterproofing membrane (25) that is in waterproof engagement with the membrane of the footing (21b) in the channel (23) and wherein the waterproofing membranes (22, 25) comprise an absorptive clay disposed between water permeable layers.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*